

Double Stacked Dual RCD Lumo[®] Consumer Unit Datasheet

MCU28S/80TI/W, MCU36S/80TI/W




CONSTRUCTION AND FEATURES:

- Dual tariff consumer unit with 1 x IS2100 isolators and 2 x 80A 30mA RCDs
- 1.2mm steel
- Powder coated durable white gloss finish
- LED illuminating feature LUMO[®] as standard (on both lids)
- Both lids with locks
- 40mm tail entry knockouts
- Multiple knockouts all around the unit (including rear face)
- Label and instruction sheet included
- Accessory pack (including battery)
- BS7671 Amendment 3 - regulation 421.1.201 compliant
- 5 year warranty

TECHNICAL DATA:

- Size options: 24 or 32 spare ways
- Compatible with:
 - ROH, ROM RCBOs
 - MD, MC, MH MCBs
 - IS2100 Isolators
 - RC2 RCDs
 - Various SPDs
- Rated current: 100A
- Earthing: stud, contact bushes and 1 x terminal bar
- 3 x Neutral terminal bars
- Busbar: 100A pin type
- Internal cable: Insulated, copper braid, heat pressed ends
- Complies to: BS EN 61439-3

DIMENSIONAL INFORMATION:

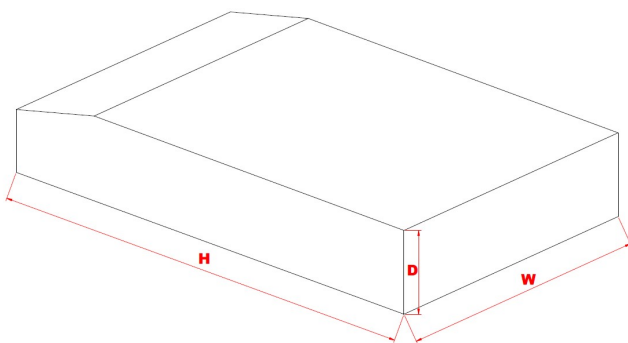

Part No	Description	No of spare ways	H (mm)	W (mm)	D (mm)
MCU28S/80TI/W	28 way, dual tariff, with 2 x IS2100	22	470	328	119
MCU36S/80TI/W	36 way, dual tariff, with 2 x IS2100	30	470	395	119

