

# Empty Metal Lumo<sup>®</sup> Consumer Unit Datasheet

## MCU04, 06, 08, 10, 14, 18, 22/W




### CONSTRUCTION AND FEATURES:

- 1.2mm steel
- Powder coated durable white gloss finish
- Pattresses available: 14, 18, 22 ways
- LED illuminating feature LUMO<sup>®</sup> as standard
- 40mm tail entry knockouts
- Multiple knockouts all around the unit (including rear face)
- Label and instruction sheet included
- Accessory pack (including battery)
- BS7671 Amendment 3 - regulation 421.1.201 compliant

### TECHNICAL DATA:

- Size options: 4, 6, 8, 10, 14, 18, 22 ways
- Compatible with:
  - ROH, ROM RCBOs
  - MD, MC, MH MCBs
  - IS2100 Isolators
  - RC2 RCDs
  - Various SPDs
- Rated current: 63, 80, 100A
- Earthing: stud, contact bushes and 1 x terminal bar
- 1 x Neutral terminal bar
- Busbar: 100A pin type
- Neutral cable: Insulated, copper braid, heat pressed ends
- Complies to: BS EN 61439-3

### DIMENSIONAL INFORMATION:

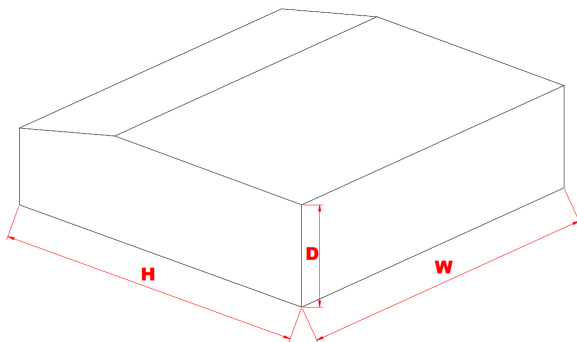

Part No	No of spare ways	H (mm)	W (mm)	D (mm)
MCU04/W	4	230	146	110
MCU06/W	6	230	182	110
MCU08/W	8	230	218	110
MCU10/W	10	230	264	110
MCU14/W	14	230	328	110
MCU18/W	18	230	398	110
MCU22/W	22	230	468	110

